
Model specification :

- BR-FRESH Height adjustable armrests with integrated hard pad
- BS-BALANCE-NY 700 Nylon chair base
- MS-FREE-SY-TR Autoweighing mechanism with seat slider

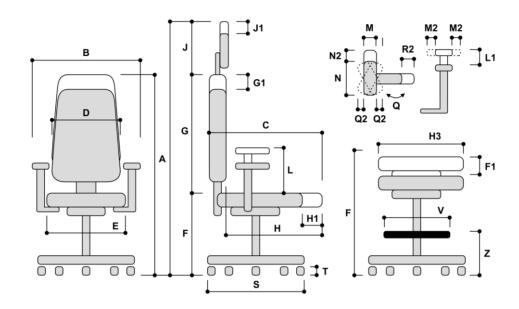

Total height (version without headrest)	Overall dimensions (mm)		From	То		Stroke
Total width	Total height (version with headrest)	Α	1130	1350		
Total depth	Total height (version without headrest)	Α	1015	1125		
Back width	Total width	В	665			
E	Total depth	С	530	585		
Height to top of seat Back height from top of seat G 585 G1 Seat depth (measured from lumbar support) H 435 Seat depth (measured as depth of seat only) H3 465 Headrest height J 115 Armrest height from top of seat L 170 Armrest pad width M 85 Armrest pad lateral movement (measured on one side) Armrest pad length N 225 Armrest pad angle (measured as rotation to one side) Additional width of rotated armrest pad (on one side) Additional width of rotated armrest (for one armrest) Base diameter S 700 Wheel diameter V	Back width	D	485			
Back height from top of seat Seat depth (measured from lumbar support) H 435 490 H1 55 Seat depth (measured as depth of seat only) H3 465 Headrest height J 115 225 J1 110 Armrest height from top of seat L 170 255 L1 85 Armrest pad width M 85 Armrest pad lateral movement (measured on one side) Armrest pad length N 225 Armrest pad angle (measured as rotation to one side) Armrest pad angle (measured armrest pad (on one side) Additional width of rotated armrest pad (on one side) Alterial movement of whole armrest (for one armrest) R2 Base diameter S 700 Wheel diameter V	Seat width	E	485			
Seat depth (measured from lumbar support) H 435 490 H1 55 Seat depth (measured as depth of seat only) Ha 465 Headrest height J 115 225 J1 110 Armrest height from top of seat L 170 255 L1 85 Armrest pad width M 85 Armrest pad lateral movement (measured on one side) Armrest pad length N 225 Armrest pad front-back movement N2 Armrest pad angle (measured as rotation to one side) Additional width of rotated armrest pad (on one side) Q Additional width of rotated armrest (for one armrest) R2 Base diameter S 700 Wheel diameter T 50 Footrest diameter	Height to top of seat	F	430	540	F1	110
Seat depth (measured as depth of seat only) H3 465 Headrest height J 115 225 J1 110 Armrest height from top of seat L 170 255 L1 85 Armrest pad width M 85 Armrest pad lateral movement (measured on one side) Armrest pad length N 225 Armrest pad front-back movement N2 Armrest pad angle (measured as rotation to one side) Additional width of rotated armrest pad (on one side) Additional width of whole armrest (for one armrest) Base diameter S 700 Wheel diameter T 50 Footrest diameter V	Back height from top of seat	G	585		G1	
Headrest height Armrest height from top of seat L 170 255 L1 85 Armrest pad width M 85 Armrest pad lateral movement (measured on one side) M2 Armrest pad length N 225 Armrest pad front-back movement N2 Armrest pad angle (measured as rotation to one side) Q Additional width of rotated armrest pad (on one side) Q Lateral movement of whole armrest (for one armrest) R2 Base diameter S 700 Wheel diameter V	Seat depth (measured from lumbar support)	Н	435	490	H1	55
Armrest height from top of seat Armrest height from top of seat Armrest pad width M 85 Armrest pad lateral movement (measured on one side) Armrest pad length N 225 Armrest pad front-back movement N2 Armrest pad angle (measured as rotation to one side) Additional width of rotated armrest pad (on one side) Additional width of rotated armrest (for one armrest) R2 Base diameter S 700 Wheel diameter V	Seat depth (measured as depth of seat only)	Н3	465			
Armrest pad width Armrest pad lateral movement (measured on one side) Armrest pad length N 225 Armrest pad front-back movement N2 Armrest pad angle (measured as rotation to one side) Additional width of rotated armrest pad (on one side) Q Lateral movement of whole armrest (for one armrest) Base diameter S 700 Wheel diameter T 50 Footrest diameter	Headrest height	J	115	225	J1	110
Armrest pad lateral movement (measured on one side) Armrest pad length N 225 Armrest pad front-back movement N2 Armrest pad angle (measured as rotation to one side) Additional width of rotated armrest pad (on one side) Qautateral movement of whole armrest (for one armrest) Rase diameter S 700 Wheel diameter T 50 Footrest diameter	Armrest height from top of seat	L	170	255	L1	85
Armrest pad length Armrest pad front-back movement Armrest pad angle (measured as rotation to one side) Additional width of rotated armrest pad (on one side) Lateral movement of whole armrest (for one armrest) Base diameter S 700 Wheel diameter T 50 Footrest diameter V	Armrest pad width	М	85			
Armrest pad front-back movement Armrest pad angle (measured as rotation to one side) Additional width of rotated armrest pad (on one side) Lateral movement of whole armrest (for one armrest) Base diameter S 700 Wheel diameter T 50 Footrest diameter V	Armrest pad lateral movement (measured on one side)	M2				
Armrest pad angle (measured as rotation to one side) Additional width of rotated armrest pad (on one side) Lateral movement of whole armrest (for one armrest) Base diameter S 700 Wheel diameter T 50 Footrest diameter V	Armrest pad length	N	225			
Additional width of rotated armrest pad (on one side) Lateral movement of whole armrest (for one armrest) Base diameter S 700 Wheel diameter T 50 Footrest diameter V	Armrest pad front-back movement	N2				
Lateral movement of whole armrest (for one armrest) Base diameter S 700 Wheel diameter T 50 Footrest diameter V	Armrest pad angle (measured as rotation to one side)	Q				
Base diameter S 700 Wheel diameter T 50 Footrest diameter V	Additional width of rotated armrest pad (on one side)	Q2				
Wheel diameter T 50 Footrest diameter V	Lateral movement of whole armrest (for one armrest)	R2				
Footrest diameter V	Base diameter	S	700			
	Wheel diameter	Т	50			
Height to top of footrest Z	Footrest diameter	٧				
	Height to top of footrest	Z				